


# Nice MoonLight

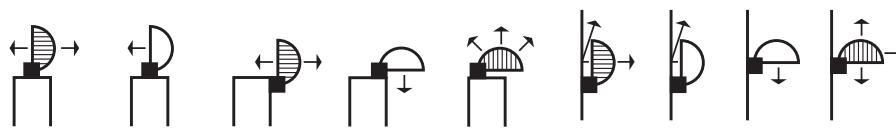

<b>ML</b> <b>ML24</b> <b>MLB</b>	 A circular orange LED light fixture with a textured lens and a black mounting bracket.	<b>MLT</b> <b>ML24T</b> <b>MLBT</b> <b>MLL</b>	 A circular white LED light fixture with a textured lens and a black mounting bracket, labeled "Nice" at the bottom.
--	--	---	---

Code	Description	Pc/Pack
<b>ML</b>	Orange, 230 Vac, for preset control units	1
<b>MLT</b>	Neutral, 230 Vac, for preset control units	1
<b>ML24</b>	Orange, 24 Vac/Vdc, for preset control units	1
<b>ML24T</b>	Neutral, 24 Vac/Vdc, for preset control units	1
<b>MLB</b>	Orange, 12 Vac/Vdc, for preset control units	1
<b>MLBT</b>	Neutral, 12 Vac/Vdc, for preset control units	1
<b>MLL</b>	Neutral, 230 Vac, for non preset control units. Supplied with one white lamp and one orange lamp	1

### **Flashing signal light.**

**Available with different power supply voltages:** 230 Vac, 24 Vdc and 12 Vdc.

**Practical:** suitable for mounting in any position

**Incorporated 433.92 MHz aerial  
on all versions.**

IP44 protection level

**Available in two colours:  
orange and neutral.**

New Moonlight MLL

**Ideal for all control units without provision for flashing light output, can be used on all 230 V control units: connected directly to the power line, this product monitors absorption and is activated automatically when the automation starts to operate.**

**Dual function:** programmable in flashing light or courtesy light mode.

**Flashing light:** activated when an automation manoeuvre is in progress.

**Courtesy light:** activated when the automation starts to operate and, thanks to the internal timer, remains activated for a programmable time interval.